
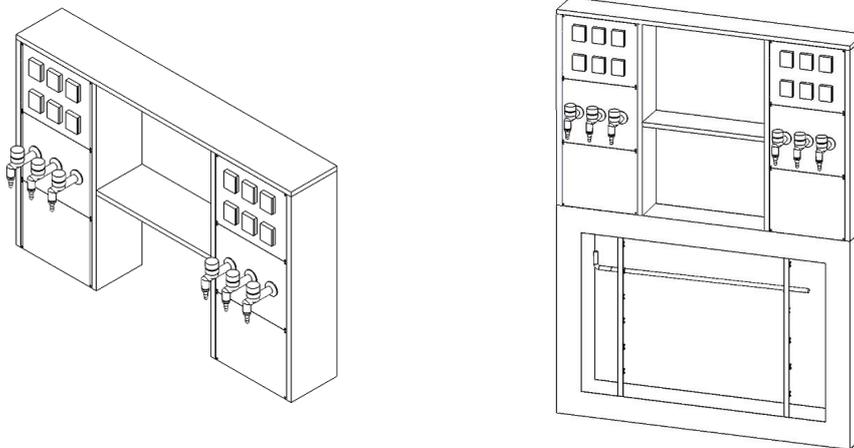



cat. no. 206.01

Media panel

**MEDIA PANEL OF TYPE LSK**

- Laboratory table is designed for safe work with chemicals, gases and laboratory instruments.
- A media panel of type **LSK** consists of lower and upper installation panel.
- The upper installation panel can be installed independently from the bottom one.
- Upper installation panel consists of lateral metal posts and metal removable cartridges.
- Between the posts of the upper installation panel can be added a shelf and / or lighting.
- Media installed into a medium panel are selectable. The enlargement is recommended to consult with the seller.
- Media can be brought from the floor or ceiling. If the supply brought from the ceiling, to the system must be added chimney for achieving of the covering of distribution.
- Basic exchange cartridge is full (3). It may be replaced by a cartridge for electrical outputs (1) or cartridge for the media (2). In compliance with safety standards
  - Electrical socket (1). Max.6 electrical sockets in a single cartridge
  - Data socket. It is recommended one data socket in a single cartridge or data socket combined with electrical sockets
  - Outputs for the media (2). Maximum number of media in a cartridge - 3 pieces
- Load capacity of shelf 25 kg

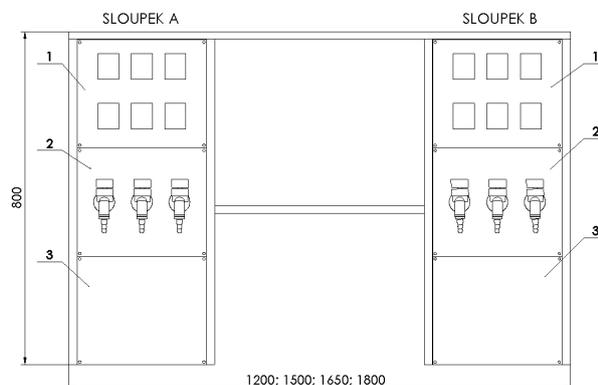

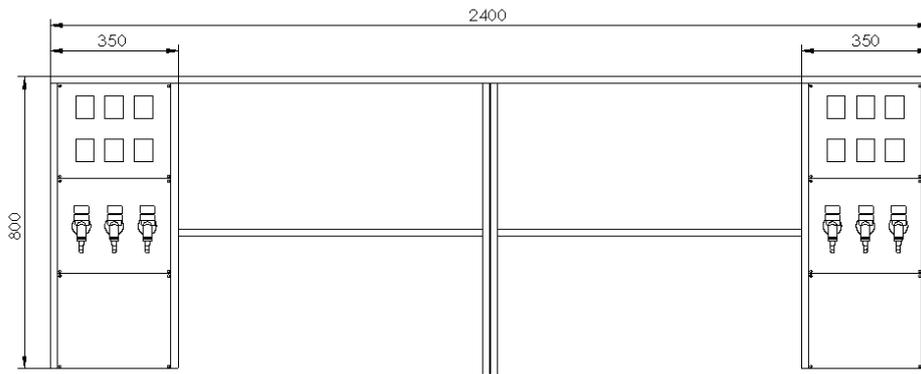

*Note: Electrical cartridge can not be placed under the media outlets*


## Variants of implementation

<b>Dimension series</b>	<b>[ mm ]</b>
<i>The length of the table</i>	1200, 1500, 1650, 1800, 2400
<i>One sided table: (Depth of working surface / depth of the media panel)</i>	750 (600+150), 900 (750+150)
<i>Double sided table: The depth of the table (working surface + media panel + working surface)</i>	1350 (600+150+600), 1500 (675+150+675) 1650 (750+150+750)
<i>The height of working surface</i>	900 (for standing operators), 750 (for seated operators)
<i>Overall height with a top media panel</i>	1700 (900+800) 1550 (750+800)

## Optional accessories

- sockets 230V, 400V with the main switch
- socket for PC
- media and water outlets
- eye shower
- vertical bars for the placement of apparatuses
- lighting

## Sample of set:

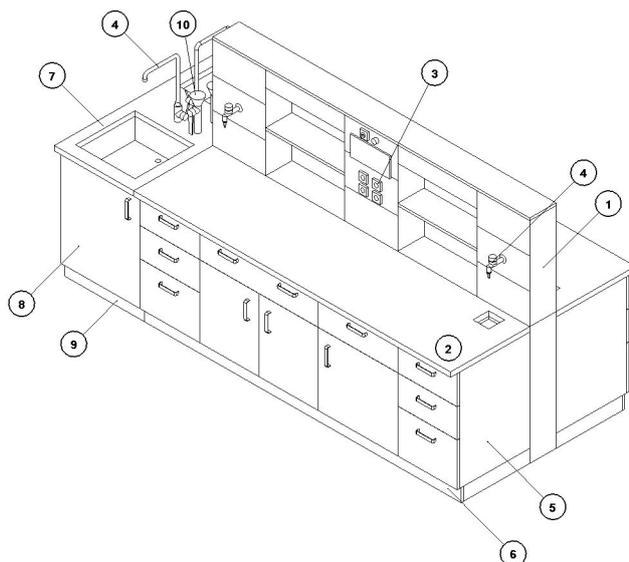

- 1 - Media panel, chapter 206.01
- 2 - Worktop, chapter 205.01
- 3 - Electrical installations, chapter 207.03
- 4 - Liquid and gaseous media outlets, chapter 207.03
- 5 - Cabinet for table assembly, chapter 204.02
- 6 - Covering to the floor, chapter 204.04
- 7 - Worktop, chapter 205.01
- 8 - Sink cabinet, chapter 204.01
- 9 - Covering to the floor, chapter 204.04
- 10 - Safety shower, chapter 207.04

## MORE INFORMATION, PHOTOS



## TECHNICAL DATA

### Type designation

Media panel of type LSK

### Combination of installation panels

Upper installation panel

Both installation panels

## Width

width	value
1200 mm	Panel width
1500 mm	Panel width
1650 mm	Panel width
1800 mm	Panel width
2400 mm	Panel width*
2400 mm	Panel width**

\* A media panel with a center partition.

\*\* A media panel with a central pillar.

## The height of the bottom panel (working surface)

height	value
750 mm	The height of the bottom panel (working surface.)
900 mm	The height of the bottom panel (working surface.)

The height of the lower installation panel is dependent on the height of the working surface. Therefore, it must be the same as the desired height of the working surface.

## Variants of design

Assembling of the table with media panel creates a one-sided table

Assembling of the table with media panel creates an islet table

## Accessories - supply of media

Supply of media from the ceiling. The supply panel is appended to the assembly

Supply from the floor. The assembly in the basic version

## Accessories - Lighting

Lighting is not required

Lighting is part of the assembly

## Accessories - shelves

Shelves are not a part of the assembly.

The part of assembly is the glass shelf with aluminum frame

The part of assembly is the laminate shelf

The part of assembly is the shelf made from TRESPA material